


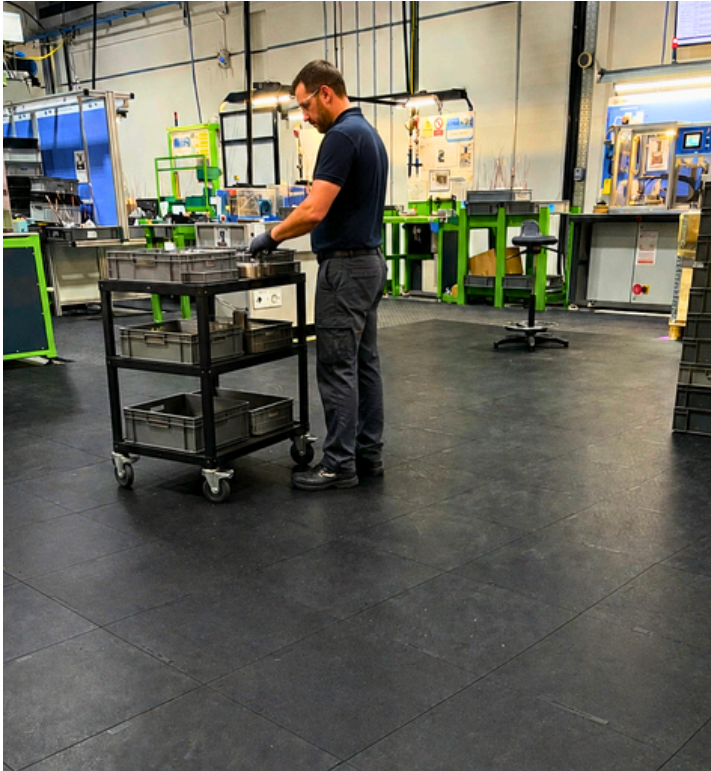


ULTRA-ROBUST. SMOOTH MATS.

Heavy-duty modular tile system with a smooth surface for frequent wheeled traffic. Easy to install, extend and reconfigure.

- Smooth “Elephant Skin” surface allows carts, trolleys and work chairs to move easily while helping protect the floor underneath.
- Designed for intensive use, up to 24/7 across multiple shifts.

Cushioning
Pressure Distribution
Bounce-Back
Top Surface Grip
Floor Grip

Firm
Ultimate
Medium
Standard
Standard



Recommended Use

For demanding dry work areas requiring long-lasting ergonomic support and frequent movement of wheeled equipment, carts or work chairs, including areas exposed to oils or welding sparks.

Ergonomic Guidance

- For continuous daily standing up to full shifts.
- Suitable for all user sizes.

Available Configurations

- 46 × 46 cm modular tiles.
- Yellow and black safety ramps.
- Connectable with all H-Series.

Lifetime Warranty

Covering Manufacturing Defects



IN PARTNERSHIP WITH ergo**advantage**

TECHNICAL SPECIFICATIONS

Material	100% Recycled PVC
Fire Rating	E _{fl} – s2
Max Load Capacity	Standard: 1,000 kg/m ² Recommended max. rolling load: 300 kg With optional heavy-duty inserts: up to 4,500 kg/m ²
Welding Resistance	High
Moisture Resistance	High
Oil Resistance	High
Chemical Resistance	High
Recyclable	Yes
REACH	Yes
Phthalate-Free	Yes

INSTALLATION & MAINTENANCE


Prepare your surface: Floor must be clean, dry, and free of dust or grease.

Place your mat: Connect the tiles together to create the desired area.

Routine cleaning: Sweep or hose down to remove dust, debris and residues.


Deep cleaning: Clean with a pH-neutral floor cleaner and non-abrasive tools; rinse thoroughly to remove residue. Avoid harsh chemicals and abrasive pads that can fill the anti-slip texture or compromise traction.

H6 Series Tile



Article Number	Dimensions	Weight (kg)	Thickness	Top Surface	Color
H6T4646STBL	46 cm x 46 cm	2.5 kg	2.5 cm	Smooth Top	Black

Yellow Safety Ramps



Article Number	Dimensions	Weight (kg)	Thickness	Top Surface	Color
HRF1046CDYL	Female 46 cm x 10 cm (regular)	0.54 kg	2.5 cm	Compression Dome	Yellow
HRF1055CDYL	Female 55 cm x 10 cm (with corner)	0.68 kg	2.5 cm	Compression Dome	Yellow
HRM1046CDYL	Male 46 cm x 10 cm (regular)	0.64 kg	2.5 cm	Compression Dome	Yellow
HRM1055CDYL	Male 55 cm x 10 cm (with corner)	0.73 kg	2.5 cm	Compression Dome	Yellow

Black Safety Ramps



Article Number	Dimensions	Weight (kg)	Thickness	Top Surface	Color
HRF1046CDBL	Female 46 cm x 10 cm (regular)	0.54 kg	2.5 cm	Compression Dome	Black
HRF1055CDBL	Female 55 cm x 10 cm (with corner)	0.68 kg	2.5 cm	Compression Dome	Black
HRM1046CDBL	Male 46 cm x 10 cm (regular)	0.64 kg	2.5 cm	Compression Dome	Black
HRM1055CDBL	Male 55 cm x 10 cm (with corner)	0.73 kg	2.5 cm	Compression Dome	Black